

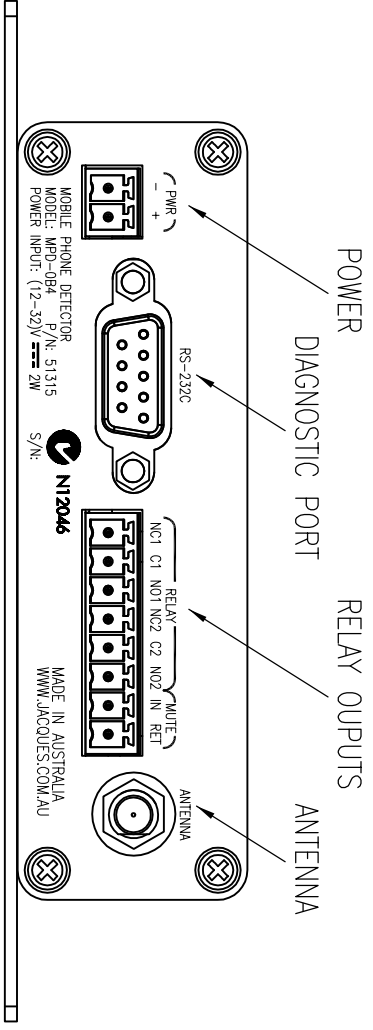



FRONT PANEL

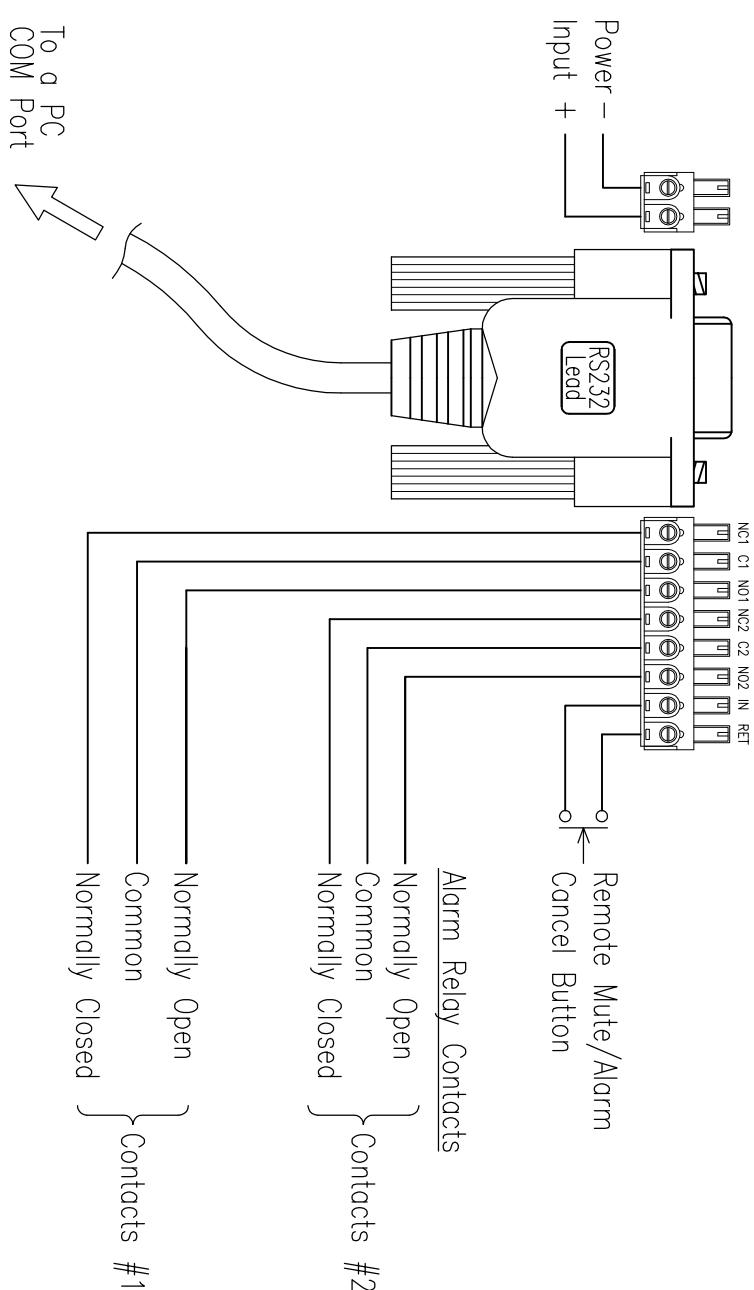

REAR PANEL





TERMINATION DETAILS

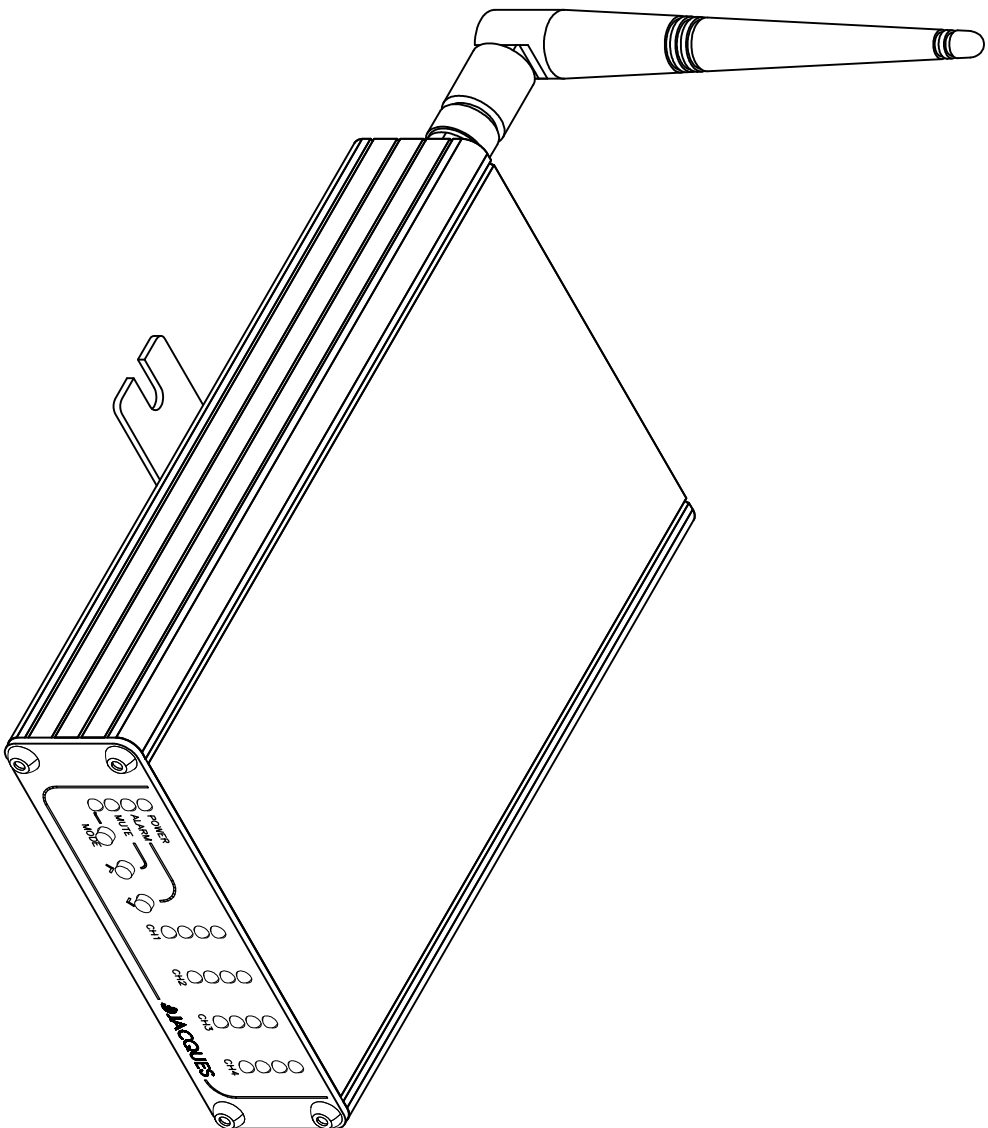

MPD-0B4

WITH MOUNTING BRACKET

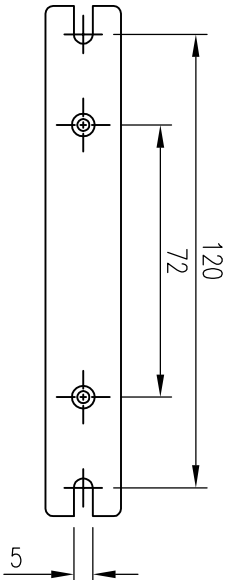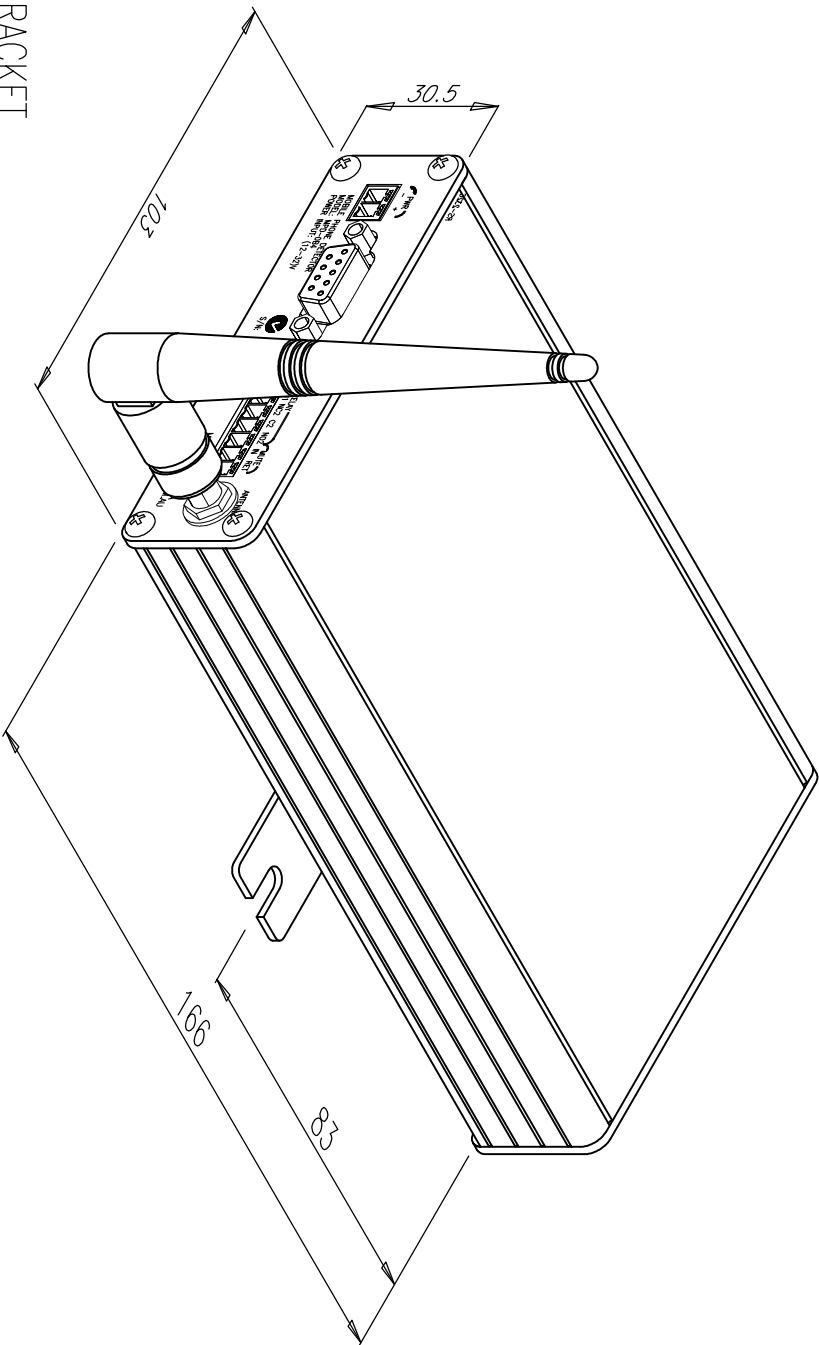

MOUNTING BRACKET DETAIL

- NOTES:
1. Power Input is (12–32) V d.c./2 W.
 2. Relay contacts are rated at 30 V / 1 A maximum.
 3. Two separate sets of alarm relay contacts are available.
 4. Power plug connector type is Dinkle EC381V-02P or similar.
 5. Relay/Mute plug connector type is Dinkle EC381V-08P or similar.
 6. Supplied antenna is detachable to allow for use of other types of external antennae.
 7. Straight through DB9M–DB9F serial cable is used to connect unit to a PC for diagnostics and/or for logging and control purposes.


To a PC
COM Port

TERMINATION DETAILS

NOTHING CLOSER

©2014 Jacques Technologies PTY LTD

REV	DATE	CHANGE DESCRIPTION	BY
1	2014-09-18	DRAWING FRAME UPDATED. MPD-0B4 CORRECTED IN VIEW WITH MOUNTING BRACKET.	LFB



JACQUES
Future Proof Communications

(C) Copyright Jacques Technologies Pty Ltd. All rights reserved.
289 Montague Rd, West End 4101, Australia
Ph: +61 7 2946 8400 Fax: +61 7 2944 1078
www.jacques.com.au info@jacques.com.au

MPD-0B4
MOBILE PHONE DETECTOR

DRAWN: DATE: 2009-06-11		ADAPTED FROM: N/A		FILENAME: 51315-INS.dwg	
CHECKED: DATE:	SCALE: N.T.S.	SHEET: 1 of 1		SIZE: A2	
APPROVED: DATE:		DWG NO: 51315-INS		REV: 1	