




SCS-150+

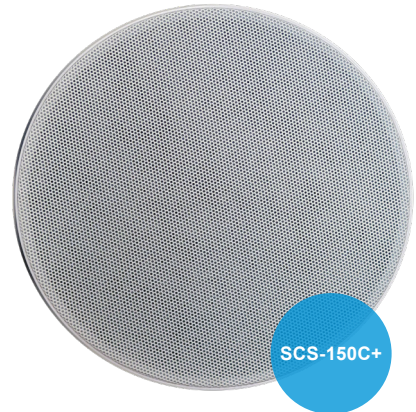

SCS-150C+

IP SMART CEILING SPEAKER SCS-150+ SCS-150C+

PRODUCT CODE 52011 52012

FEATURES

- IP PoE internal ceiling speaker
- Standard PoE powered (IEEE 802.3af)
- Dual cone or coaxial flush mount options
- Internal microphone for automated speaker output fault detection
- Two configurable relays
- Tamper detection and device removal notification
- Ideal for classrooms, hallways, boardrooms or office environments

SPECIFICATIONS

SPECIFICATIONS	SCS-150+	SCS-150C+
Driver size	150 mm (6"), dual cone	150 mm (6") & 25 mm (1") coaxial
Sensitivity (1 W/1 m)	89 dB	92 dB
Frequency Response	80-20 kHz	70-20 kHz
Dispersion Degrees @ 1 kHz	100	100
Speaker Amplifier	50 Hz – 7 kHz (output circuit frequency response – 3dB), 2.5 W	
Audio Streaming Bandwidth	128 kb/s one way	
Auxiliary Functions	Relay contacts (2 x No/Nc), 30 V d.c./2 A Tamper detection and device removal notification	
Dimensions	240 mm x 115 mm	232 mm x 110 mm
Cutout Dimensions	208 mm diameter	208 mm diameter
Weight	0.9 kg	1.2kg
Grill Material & Finish	Steel, powder coated	Steel, powder coated
Grill Colour	White	White Black 52013
Power Input	IEEE 802.3af Power over Ethernet (PoE) (cannot be locally powered)	
Power Consumption	4.5 W max. (1.6 W standby) PoE Class 2 (3.84-6.49) W	
Cabling	4 pair UTP CAT-5/6, multi-strand, 24 AWG, max. 100 m	
Environment	Indoor	
Operating Temperature	(0 - 55) °C	
Operating Humidity	(10 - 95) % relative humidity (non-condensing)	